

Omega Moduline

96636392 OMEGA M 4800-840 HFIX WHG Q600


THORN




Omega Moduline

A sustainable LED panel utilising replaceable modular linear LED light sources and driver for office and education applications. Each complete LED module can be easily replaced tool-free and offers a simple click-in mechanism, this allows a change of LED modules at end of life or the change of colour temperature or colour rendering if desired. A combination of deep cells with primary lenses provides high quality lighting with even light distribution and efficient glare control at very high brightness of the LED modules. Electronic, DALI-2 dimmable. Class II electrical, IP20, Impact strength: IK03. Body: white. LED module reflector finished in white. Suitable for recessed lay in grid ceilings as standard and when combined with additional accessories will allow installation in concealed ceilings, plasterboard ceilings, surface-mounted and suspended. All accessories need to be ordered separately. Rated median useful life: L90 50000 h at 25 °C. Colour Rendering Index min.: 80 Complete with 4000K LED.

Dimensions: 597 x 597 x 33 mm
Luminaire input power: 33.8 W
Luminaire luminous flux: 5000 lm
Luminaire efficacy: 148 lm/W
Weight: 2.65 kg

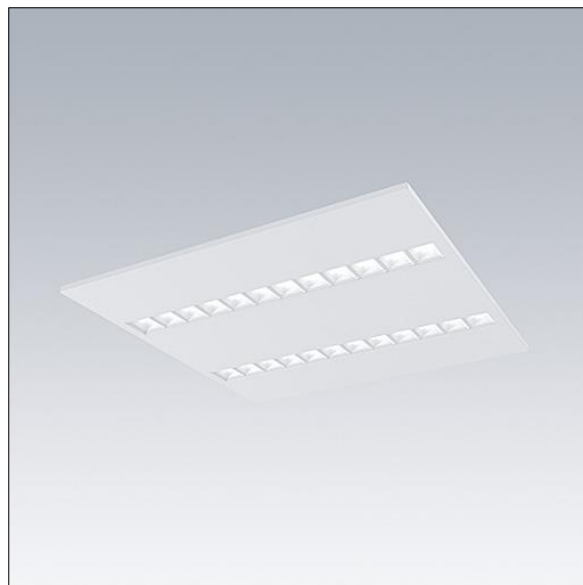

TLG_OMGM_F_600X600.jpg

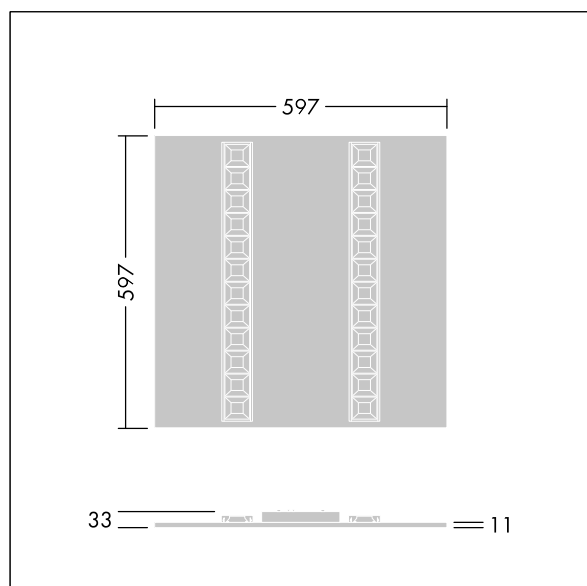

TLG_OMGM_M_600X600.wmf

Dette produkt indeholder en lyskilde i energieffektivitetsklasse D.

Alle værdier markeret med * er nominelle værdier. Thorn bruger gennemprøvede komponenter fra førende leverandører, men der kan opstå isolerede tilfælde af teknologi-relaterede svigt på særskilte LED i løbet af det klassificerede produkts levetid. Internationale standard sætter tolerancen ved bevaret lysudbytte og tilsluttet belastning til $\pm 10\%$. Medmindre andet er angivet, gælder værdierne for en omgivelsestemperatur på 25° C.

Thorn Lighting foretager løbende videreudvikling og optimering af sine produkter. Der forbeholdes alle rettigheder til at ændre på specifikationerne uden forudgående varsel eller offentlig bekendtgørelse. © Thorn Lighting