

Voyager One

THORN

96636595 VOYAGER ONE CON ANT HP ECC WH


IP20 IK03   T_a-10
+40

Voyager One

Slim IP20 LED emergency lighting luminaire; Luminaire for central emergency light supply, with circuit monitoring, without single monitoring of the luminaire; high performance (HP) version enables wider luminaire spacing and applications with higher illuminances (e.g. 5 lux, 1 footcandle); ; Cable length from emergency power source to last luminaire: 300 m; additional click-optics optimised for escape routes and open areas from higher mounting heights available; Click in legends for viewing from a maximum distance of 23 m and 30 m available to convert to escape sign luminaire; housing made of polycarbonate white; cover mode of transparent polycarbonate; Tool-less 'click' mounting; zero maintenance thanks to LED technology; service life of 50,000 h at constant luminous flux; Power supply: 220/240 V AC; Luminaire input power: 5.6 W; IP20; class of protection: SC2; Impact strength: IK03; Dimensions: 336 x 59 x 158 mm; weight: 0.61 kg



TLG_VOYO_F_CONTUS.jpg

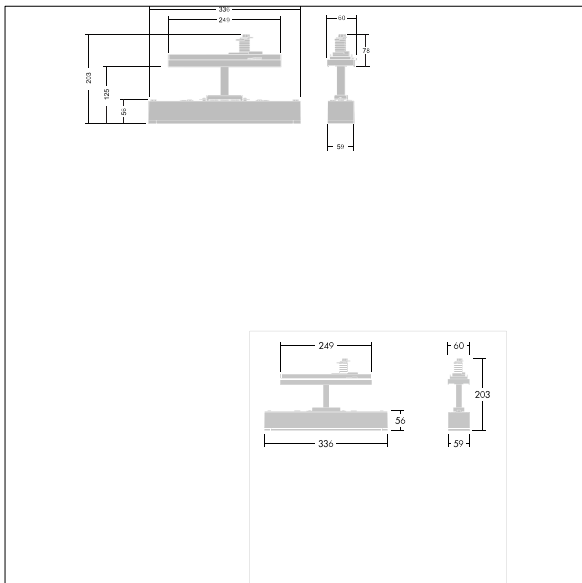

TLG_VOYO_M_CONTUS.wmf

Alle værdier markeret med * er nominelle værdier. Thorn bruger gennemprøvede komponenter fra førende leverandører, men der kan opstå isolerede tilfælde af teknologi-relaterede svigt på særskilte LED i løbet af det klassificerede produkts levetid. Internationale standarder sætter tolerancen ved bevaret lysudbytte og tilsluttet belastning til $\pm 10\%$. Medmindre andet er angivet, gælder værdierne for en omgivelsestemperatur på 25° C.

Thorn Lighting foretager løbende videreudvikling og optimering af sine produkter. Der forbeholdes alle rettigheder til at ændre på specifikationerne uden forudgående varsel eller offentlig bekendtgørelse. © Thorn Lighting

Voyager One

96636595 VOYAGER ONE CON ANT HP ECC WH

THORN