



PopPack

PopPack LED grundarmatur

- Én LED til én udskiftning af enkelt- og dobbeltrørs T8/T5-lysrørsarmatur
- Op til 153 lm/W – overstiger byggeindustriens krav
- Skruer (ekstraudstyr) kan føjes til endegavlne for at låse huset og derved øge sikkerheden
- Yderligere besparelser kan opnås via DALI-kontrol og en indbygget PIR-sensor.
- Versions adapted for mounting onto Contus trunking available.



Fotografier, stregtegninger og fotometriske data er udelukkende repræsentative. Vælg et individuelt produkt for at få specifikke produktoplysninger.

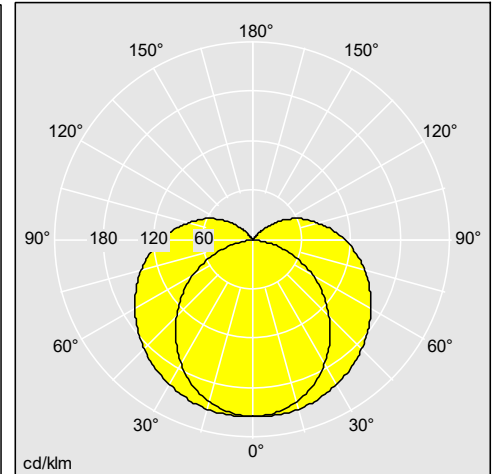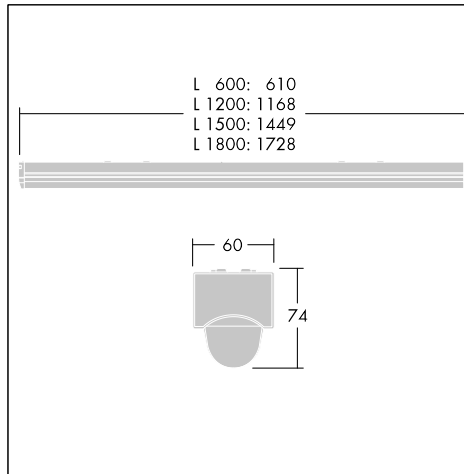

96242251

Material/Finish

Batten: pre-coated roll form steel, white (RAL9016)
 End caps/lamp holders: injection moulded polycarbonate, white
 Diffuser: textured opal acrylic
 Contus adapter: pre-coated roll form steel, white (similar to RAL9016)

Installation/montering

1 or 2 x (3 x 2 x 2.5mm²) terminal blocks with capacity for loop in/out 2.5mm² cables. Ambient temperature: -20 to +25°C for the standard product, 0 to 25°C for the emergency versions, normal, dry, indoor atmospheres. Suitable for direct surface mounting, BESA mounting or wire suspension. Easy alignment through slots in the spine. Optional screws can be added to end caps to lock the housing.

Versions adapted for Contus trunking come pre-assembled, ready to fit quickly and easily with twist & lock mechanical/electrical connections.

PopPack

Bestillingsvejledning

Beskrivelse	ILCOS kode	Sokkel	Vægt (kg)	SAP nummer	Kat. nr.
PopPack grundarmaturer					
POPPACK LED 6500-840 HF L1800	LED		1,8	96631566	5037319566670
POPPACK LED 11000-840 HF L1800	LED		1,8	96631570	5037319566717
POPPACK LED 3000-830 HF L1200	LED		1,4	96631574	5037319566755
POPPACK LED 4500-830 HF L1200	LED		1,4	96631575	5037319566762
POPPACK LED 7000-830 HF L1200	LED		1,4	96631576	5037319566779
POPPACK LED 5000-830 HF L1500	LED		1,7	96631578	5037319566793
POPPACK LED 6000-830 HF L1500	LED		1,7	96631579	5037319566809
POPPACK LED 6500-830 HF L1800	LED		1,8	96631580	5037319566816
POPPACK LED 3000-840 HF L1200	LED		1,3	96631538	5037319567028
POPPACK LED 4500-840 HF L1200	LED		1,4	96631542	5037319567066
POPPACK LED 7000-840 HF L1200	LED		1,4	96631546	5037319567103
POPPACK LED 5000-840 HF L1500	LED		1,7	96631554	5037319567189
POPPACK LED 6000-840 HF L1500	LED		1,7	96631558	5037319567226
POPPACK LED 9000-840 HF L1500	LED		1,7	96631562	5037319567264
POPPACK LED 1700-840 HF L600	LED		0,74	96634320	
POPPACK LED 2300-840 HF L600	LED		0,74	96634321	
PopPack -grundarmaturer, m/dæmp					
POPPACK LED 9000-840 HFI L1500	LED		1,7	96631564	5037319566656
POPPACK LED 6500-840 HFI L1800	LED		1,8	96631568	5037319566694
POPPACK LED 11000-840 HFI L1800	LED		1,8	96631572	5037319566731
POPPACK LED 3000-840 HFI L1200	LED		1,4	96631540	5037319567042
POPPACK LED 4500-840 HFI L1200	LED		1,4	96631544	5037319567080
POPPACK LED 7000-840 HFI L1200	LED		1,4	96631548	5037319567127
POPPACK LED 5000-840 HFI L1500	LED		1,7	96631556	5037319567202
POPPACK LED 6000-840 HFI L1500	LED		1,7	96631560	5037319567240
POPPACK LED 1700-840 HFI L600	LED		0,83	96634322	
POPPACK LED 2300-840 HFI L600	LED		0,83	96634323	
PopPack -grundarmaturer, nødllys					
POPPACK LED 9000-840 HF E3 L1500	LED		2,3	96631563	5037319566649
POPPACK LED 6500-840 HF E3 L1800	LED		2,5	96631567	5037319566687
POPPACK LED 11000-840 HF E3 L1800	LED		2,5	96631571	5037319566724
POPPACK LED 3000-840 HF E3 L1200	LED		2	96631539	5037319567035
POPPACK LED 4500-840 HF E3 L1200	LED		2	96631543	5037319567073
POPPACK LED 7000-840 HF E3 L1200	LED		2	96631547	5037319567110
POPPACK LED 5000-840 HF E3 L1500	LED		2,3	96631555	5037319567196
POPPACK LED 6000-840 HF E3 L1500	LED		2,3	96631559	5037319567233
PopPack -grundarmaturer, m/dæmp, nødllys					
POPPACK LED 9000-840 HFI E3 L1500	LED		2,3	96631565	5037319566663
POPPACK LED 6500-840 HFI E3 L1800	LED		2,5	96631569	5037319566700
POPPACK LED 11000-840 HFI E3 L1800	LED		2,5	96631573	5037319566748
POPPACK LED 3000-840 HFI E3 L1200	LED		2	96631541	5037319567059
POPPACK LED 4500-840 HFI E3 L1200	LED		2	96631545	5037319567097
POPPACK LED 7000-840 HFI E3 L1200	LED		2	96631549	5037319567134

PopPack

Beskrivelse	ILCOS kode	Sokkel	Vægt (kg)	SAP nummer	Kat. nr.
POPPACK LED 5000-840 HFI E3 L1500	LED		2,3	96631557	5037319567219
POPPACK LED 6000-840 HFI E3 L1500	LED		2,3	96631561	5037319567257
PopPack -lameller, med sensor					
POPPACK LED 3000-840 PIR L1200	LED		1,4	96631581	5037319566823
POPPACK LED 4500-840 PIR L1200	LED		1,4	96631582	5037319566830
POPPACK LED 7000-840 PIR L1200	LED		1,4	96631583	5037319566847
POPPACK LED 5000-840 PIR L1500	LED		1,7	96631585	5037319566861
POPPACK LED 6000-840 PIR L1500	LED		1,7	96631586	5037319566878
POPPACK LED 9000-840 PIR L1500	LED		1,7	96631587	5037319566885
POPPACK LED 6500-840 PIR L1800	LED		1,8	96631588	5037319566892
POPPACK LED 11000-840 PIR L1800	LED		1,8	96631589	5037319566908
PopPack tilbehør					
SWITCHLITE CC PROGRAMMER			0,017	96240295	5037319162209
POPPACK LED WIRE SUSPENSION KIT 2M			0,25	96627711	9008709774421
POPPACK LED WIRE GUARD 1,2M			0,69	96627902	9008709791534
POPPACK LED WIRE GUARD 1,8M			1,04	96627903	9008709791541
POPPACK LED WIRE GUARD 1,5m			0,74	96628147	9008709840812
POPPACK LED GROMMET KIT			0,035	59010377	
POPPACK LED SCREW KIT x20			0,06	59010828	
POPPACK LED SCREW KIT x100			0,08	59010829	